

Applications:

Recycling and filtering of water from small and medium swimming pools.

Materials:

High-strength engineering mechanical plastics with high-quality wear-resistant mechanical seal (SUS316), available for both fresh water and sea water.

O Ring in NBR.


Motor casing in aluminium.

Features

CX-ESP Series

- Pump inlet / outlet with external thread can connect with metric / imperial pipe, more convenient to operate.
- Lower noise, can lower than 67 DB.
- Thermal protection included.
- Liquid temperature: 5-50 °C.
- Ambient temperature: up to 45 °C.
- Waterproof: IP 55.
- The pump bear 25000 times of impact test, excellent performance and reliable quality.

QH. Curve of the Pump

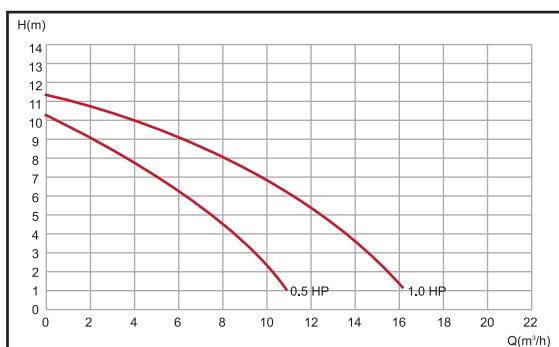

Model	Horsepower (HP)	Phase	Rated Power (KW)	Voltage	Inlet Port Dia (inch)	Outlet Port Dia (inch)	L Length (mm)	W Width (mm)	H Height (mm)
CX-20301	0.5	single	0.37	220V	1.5"	1.5"	460	160	230
CX-20302	1	single	0.75	220V	1.5"	1.5"	485	160	230